


PERFORMANCE SPECIFICATION SHEET

MODULE, OPTIONAL ELECTRONIC COMPONENTS (OEC) COMPATIBLE WITH MIL-PRF-22885/117,
SWITCHING, LOGIC FUNCTION AND TERMINAL INTERCONNECTS, COMMON TERMINATION
SYSTEM (CTS)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of [MIL-PRF-22885](#).

This specification covers the general requirements for Modules used as complementing functionality to the manually operated illuminated push button switches, switch assemblies as described on [MIL-PRF-22885/108](#), [MIL-PRF-22885/113](#) and associated OECs as described on [MIL-PRF-22885/117](#). Additionally, this specification covers modules with the exclusive functionality of a Terminal Interconnect (Terminal block).

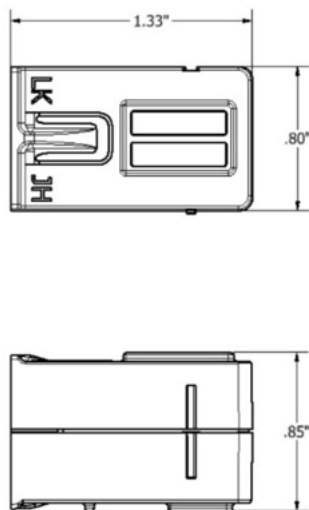


NOTES:

1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± 0.010 for three place decimals and ± 0.03 for two place decimals.
3. Each module requires a Common Termination System (CTS) connector that shall be designed and constructed to meet the performance requirements of [MIL-PRF-22885/108](#) figure 10.
4. The CTS is M22885/10818440 per [MIL-PRF-22885/108](#) and shall be acquired from a source listed on [QPL 22885](#).
5. Exact shape of the module is optional provided dimensions specified are not exceeded.

FIGURE 1. Module A.

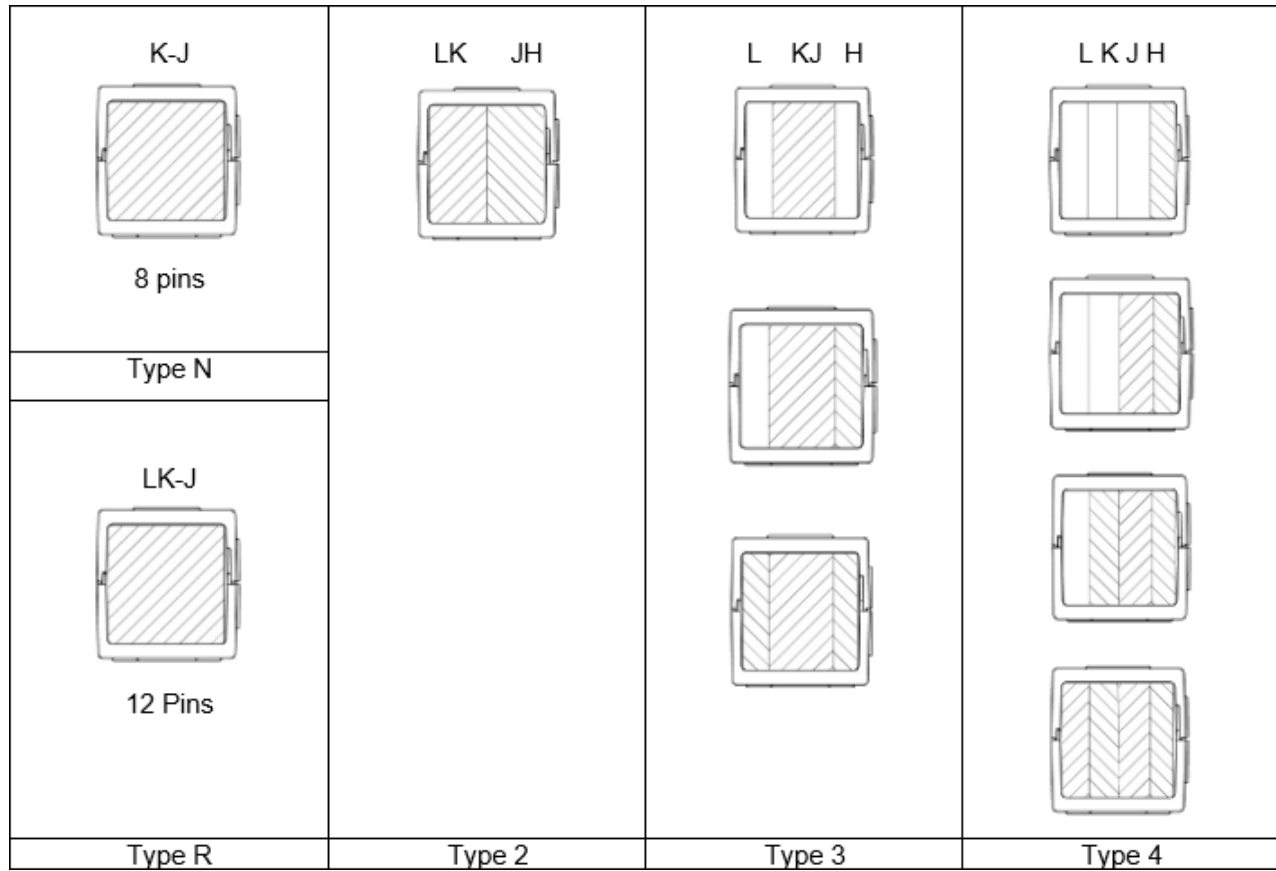


FIGURE 3. Types as defined on Table I.TABLE I. OECs in the module.

Type	Size of Component allowed per type	Occupied Position
N	1 Series N OEC required	Per Figure 3
R	1 Series R OEC required	
2	2 Series C OECs Required	
3	1 Series C OEC Required plus optional 0 to 2 Series A OECs	
4	1 Series A OEC Required plus optional 1 to 3 Series A OECs	

Notes:

- 1) See Table II for SERIES IDs
- 2) Refer to [MIL-PRF-22885/117](#) for Technical definition of each Series of OEC

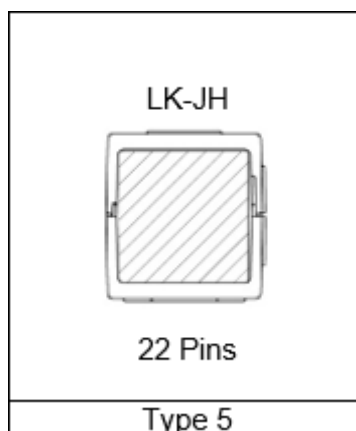Figure 4. Type as defined in Table III.TABLE II. Types of OECs in the module.

	Optional Electronic Component (OEC) Function	OEC Series	Mfg. ID	Mfg. ID Mils Spec ID
Functional and Electrical Parameters per MIL-PRF-22885/117	Solid State Relay	A	SSR	4
	Combination - Solid State Relay 1/	C	SSRC	B
	High Current Solid State Relay	A	SSR3	J
	Voltage Sensor 1/	A	VS	7
	Diode Pack	A	DP	3
	Terminal Block	A	TB	5
	Electronic Latch	C	EL	E
	Electronic Rotary	C	ER1	F
	Pulse Timer 1/	C	PT1	G
	Current Sensor 1/	A	CS	1
	Time Delay 1/	A	TD	6
	Square Wave Oscillator 1/	A	CT	2
	Defined Logic 1/	C	DL	D
	ARINC Single-Bit Converter 1/	N	SR429/1M	T
	ARINC Multi-Bit Converter 1/ 2/	N or R	SR429/4M	R
	ARINC Multi-Bit Binary Decoder 1/ 2/	N or R	SR429/4D	S
	232/422 Converter	N	RS422	V

1/ These OEC have configurable options that will only be reflected on manufacturer part numbers.


2/ These OEC can be series N or R depending of the number of pins.

Terminal Interconnects

Shall utilize the Module A from Figure 1 and the CTS as described in note 3 and 4 of Figure 1.

Terminal Interconnect splices the various positions of the Module up to max of 22 pins. See Table III.

TABLE III. Allowable Terminal Interconnects for Type 5 (see Figure 4).

	Type	Mfg. ID	# Nodes 1/	Mil- spec ID
TB22: 22 (All Pins connected)	5	MPTB1	1	1
TB11: H1-4, B, F, A, J1-4 TB11: K1-4, C, G, D, L1-4	5	MPTB2	2	2
TB11: (H1-H4, B, F, A, J1-J4) TB7: (K1-K4, C, G, D) TB4: (L1-L4)	5	MPTB3	3	3
TB11: (H1-4, B, F, A, J1-4) TB4: (K1-K4) TB3: (C, G, D) TB4: (L-4)	5	MPTB4	4	4
TB4: (H1-4) TB3: (B, F, A) TB8: (J1-4, K1-4) TB3: (C, G, D) TB4: (L1-, L4)	5	MPTB5	5	5
TB4: (H1-4) TB3: (B, F, A) TB4: (J1-4) TB4: (K1-4) TB3: (C, G, D) TB4: (L1-, L4)	5	MPTB6	6	6

1/ Maximum Current rating is 7.5 Amps per node

2/ This drawing is for reference only and it is fully described on [MIL-PRF-22885/108](#) figure 10.

GENERAL REQUIREMENTS:

Design and Construction: See Figures 1 through 3

Functional Specifications: See [MIL-PRF-22885/117](#).

Materials:

Housing: High temperature thermoplastic.

Interconnect Pins: Per [MIL-PRF-22885/117](#) and CTS per Figure 2.

Weight:

Module without CTS– 16 grams maximum

Module with CTS– 22 grams maximum

Module with CTS and Right-angle bracket – 32 grams maximum

Module with CTS and Right angle and Flush mount bracket – 42 grams maximum

Module with CTS and Right-angle bracket – 32 grams maximum

Installation Accessories:- Each module may include installation accessories such brackets or protective boots.


Shock II: High Impact Shock applicable only to OECs mounted in [MIL-PRF-22885/108](#) pushbutton switches and [MIL-PRF-22885/116](#) Logic Accessory Modules.

Electrical and EMC Requirements: See [MIL-PRF-22885/117](#) for maximum levels per each OEC.

When Environmental and EMI/EMC tests that are based on a number of actuation cycles are performed on OECs that do not actuate, the test shall be ran for a similar length of time.

Part or Identifying Numbers (PIN): PIN's are assigned as follows:

Part Number for modules listed with components from Table II

M22885/116-A - - - -


Part Number for modules listed with Interconnects Table III

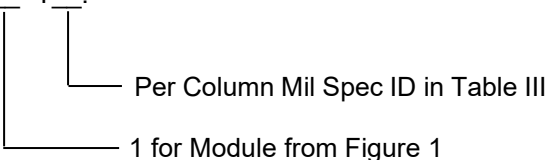
M22885/116-A - T -


TABLE IV. Group A Test Inspection.

Visual and mechanical examination (Size and weight) 1/
Operating Characteristics 2/
Dielectric Withstanding Voltage/3/4/5

1/ To be performed on each Lot and by Series of product.

2/ Functional test at typical operating voltage.

3/ Applicable between all leads and housing if metal surrounding OEC under test.

4/ Applicable between Terminal Interconnect Nodes.

5/ DWV not applicable to any other OEC

TABLE V: Initial Qualification

Test Sample	Group	Number of Samples	Additional Testing	Requirement of Additional Testing
TD1/W02S-S	I	6	II: Shock, Vibration, Salt Spray	MIL-STD-202-213 , MIL-STD-202-101
	II	2		
	III	2		
	IV	2		
	V	2		
	VI	1		
EL1-S	I	10	II: Moisture Resistance	MIL-STD-202-106
	II	2		
	III	1		
	IV	2		
	V	4		
	VI	2		
SSRCH/2121-S	I	10	III: Moisture Resistance	MIL-STD-202-106
	II	2		
	III	6		
	IV	2		
	V	2		
	VI	2		
SR429/1/353AS[20]-S	I	2	II: Thermal Shock, Shock I, Moisture Resistance, Salt Spray	MIL-STD-202-107 , MIL-STD-202-213 , MIL-STD-202-106 , MIL-STD-202-101
	II	2		
	IV	1		
	V	1		
	VI	1		
SR429/4D3XX/340GAB[23,22,21]-S	I	4	II: Thermal Shock, Shock I, Moisture Resistance	MIL-STD-202-107 , MIL-STD-202-213 , MIL-STD-202-106
	II	1		
	III	1		
	IV	1		
	V	1		
	VI	1		

Group I: Visual and Mechanical Examination, Operating Characteristics, and Marking Visibility

Group II: Altitude/Over Pressure, High Temp Survival (Operating/Non-Operating), Low Temp Survival

Group III: Thermal Shock

Group IV: Shock I, Vibration

Group V: Moisture Resistance

Group VI: Solderability

Similarity based qualification testing may be used on Optional Electronics Components (OEC) when the component being qualified has a similar reliability, similar type electronic components, and similar manufacturing process to a component that has been previously qualified and approved.

TABLE VI. Group B Inspection testing.

		Test Sample PIN's and Sample Numbers																
		LM-1210- E-MABHG		LM-1210- E-MAANP		LM-1210- E-MAEYM		LM-1210- E-MAEYN		LM-1210- E-MACPH		LM-1210- E-MADBX		LM-1210-G-MAFAE				LM-1210-X-MAGRU
		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116				M22885/116
		A1-7		A1-7		A1-7		A1-7		A1-2D2		A1-2D2		A1-64				A1-V
	Test Method	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Visual	4.7.1 of MIL-PRF-22885	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
EMC/EMI	Table LXVI MIL-PRF-22885/117	X		X		X		X		X		X				X		X
Shock I	MIL-STD-202-213		X								X			X				
Drying Period			X								X			X				
Insulation Resistance before Moisture	MIL-STD-202-302		X								X			X				
Moisture Resistance	MIL-STD-202-106		X								X			X				
Insulation Resistance after Moisture	MIL-STD-202-302		X								X			X				
Salt Spray	MIL-STD-202-101				X								X		X			

		Test Sample PIN's and Sample Numbers																
		LM-1210- E-MABHG		LM-1210- E-MAANP		LM-1210- E-MAEYM		LM-1210- E-MAEYN		LM-1210- E-MACPH		LM-1210- E-MADBX		LM-1210-G-MAFAE			LM-1210-X-MAGRU	
		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116		M22885/116			M22885/116	
		A1-7		A1-7		A1-7		A1-7		A1-2D2		A1-2D2		A1-64			A1-V	
Electrical Endurance Inductive @ Altitude	4.7.28.2 of MIL-PRF-22885						X		X								X	X
Dielectric Withstanding @ Altitude	MIL-STD-202-301						X		X								X	X
Electrical Endurance Resistive @ Sea Level	4.7.28.2 of MIL-PRF-22885						X		X								X	X
Dielectric Withstanding Voltage	MIL-STD-202-301						X		X								X	X
Operating Characteristics	4.7.6 of MIL-PRF-22885	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Dielectric Withstanding Voltage	MIL-STD-202-301		X								X			X				
Marking Visibility	MIL-STD-1285	X		X		X		X		X		X	X			X	X	

Referenced documents:

MIL-PRF-22885
MIL-PRF-22885/108
MIL-PRF-22885/117
MIL-STD-202-101
MIL-STD-202-106
MIL-STD-202-107
MIL-STD-202-213
MIL-STD-202-301
MIL-STD-202-302
MIL-STD-1285
QPL 22885

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:

Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing Activity:
DLA - CC

(Project 5930-2024-060)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at <https://assist.dla.mil/> .